

Disassembly and Storage

To disassemble unplug the power supply and detach cables from the F3 Head Unit. Then remove the Lightbank body, followed by the Head Unit. Disassemble the frame. Store the entire kit in the supplied 5' duffel.

Tips for Care and Use

Warranty Information

For the LiteGear components: LiteGear™, Inc., ("LiteGear™") warrants your Light Engines & Dimmers to be free from physical defects in material and workmanship for a period of one (1) year from the date of the original retail purchase; some exceptions apply (see full warranty statement on line). If you discover a defect covered by this warranty, LiteGear™ will repair or replace the product at its sole discretion using new or refurbished components.

For the Chimera components: Chimera's Fabric Light Control Accessories come with a limited 5-year warranty against manufacturing defects in materials, workmanship, and color stability. If our products are not fully operational out of the box or if they fail to perform within five years from the date of purchase, you can return it for repair or replacement at no charge. Chimera's warranty does not cover damage caused by accidents, improper care or use, or the natural deterioration of materials over an extended period of time.



F3

Instructions for Care and Use



Assembly

1. Layout metal tubing and corner blocks that make up the frame.




2. Begin assembly of the frame. Line up the number on the pole, with the number on the corner/connecting blocks. Ensure you are matching the numbers on the end of the poles to the numbers on the corner blocks.



3. Using push button connectors, attach poles to corner blocks. Ensure all push button connectors are securely attached.



4. Once frame is fully assembled lay down flat on the floor

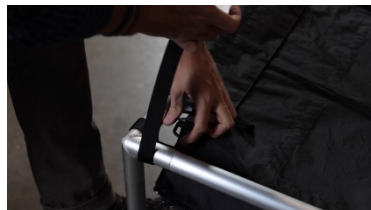

5. Unroll head unit and begin by attached the two sides with Velcro flaps to the frame. Next, secure head unit to frame with webbing and D-rings at all 4 corners. Lastly, attach the sides with zippers to the frame.



6. Once head unit is fully attached, unfold Lightbank body. To attach the Lightbank body it is best to have the frame standing on its side.



7. Slip the Lightbank body over the two corners of the frame that are off of the ground. Then rotate the frame, ensuring the Lightbank body does not touch the ground (to avoid dirtying), and slip over the remaining two corners. Secure the Lightbank body by pulling the zippers closed on all 4 corners.



8. Attach the Litegear Power Supply to the head unit using the supplied extension cable. Power on the Power Supply by flipping the switch on the unit.



9. Your F3 is now ready to go!



10. **NOTE: Dolly webbing hanging points are located on the Lightbank body itself

